

LAUDA CIRCULATION AND PROCESS THERMOSTATS

°LAUDA


Specific application examples

- Refractometer
- Polarimeter
- Single-use bioreactors
- Extruder for food production
- Micro reactors
- Responsive control in chemical/pharmaceutical surroundings
- Climate chambers
- Space simulation
- Electric mobility; battery testing
- Test rigs
- Stress test
- Crystallization regulation
- Freeze-drying
- Micro structures
- Coating plants



LAUDA LOOP

The compact, lightweight circulation thermostat for external applications from 4 to 80 °C



Extremely versatile, flexibly usable thermo-electric circulation thermostat

The LAUDA LOOP circulation thermostat is sure to impress with its constant temperature range between 4 and 80 °C. Its compact construction and low weight, as well as wide voltage input range of 100 to 240 volts, make it possible to put it to use flexibly and spontaneously anywhere in the world – the ›Plug and Play‹ setup with quick-fit couplings makes it especially easy to use. The intuitive three-button softkey operation and simple menu navigation in five available languages via the well-lit, high-contrast OLED display make using the device a breeze.




Simple three-button controls with OLED display



Standard-issue RS 232 interface for system integration into processes

PUMP CHARACTERISTIC Water

Pressure bar

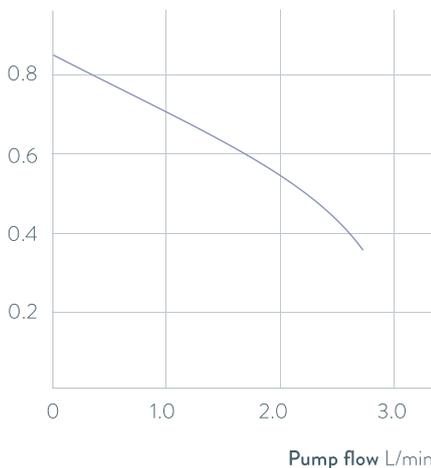

Important functions

- Pump connections with quick-fit couplings for easy consumer changes
- Can be operated with non-flammable liquids (water, water/glycol)
- Cooling technology free of coolant ensures silent, low-vibration operation

Included accessories

Hose nozzles for pump connections

Further accessories

Tubing

All technical data and power supply variants can be found in the ›Technical data‹ section.

More at www.lauda.de/1748



LAUDA LOOP

The L100 and L250 air-cooled device types achieve a cooling capacity of 120 and 250 watt. The devices are primarily for use at constant temperatures with low power requirements. Both device types are especially energy-efficient and silent in partial-load operation.




LAUDA Circulation and process thermostats


Device type overview

LAUDA LOOP / Page 80


LAUDA PRO / Page 82




LOOP 100




LOOP 250



P 2 E




RP 240 EC
RP 245 EC
RP 250 EC



RP 290 EC

LAUDA Integral T / Page 84



IN 130 T
IN 230 T
IN 230 TW



IN 530 T
IN 530 TW




IN 1030 T




IN 1330 TW

LAUDA Integral XT / Page 86



IN 150 XT
IN 250 XTW




IN 550 XT / IN 550 XTW
IN 280 XT / IN 280 XTW
IN 750 XT
IN 950 XTW




IN 1850 XTW
IN 590 XTW
IN 1590 XTW


LAUDA Variocool / Page 88

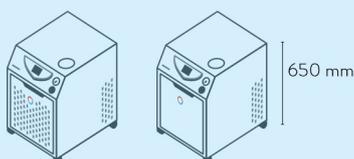

VC 1200
VC 2000
VC 1200 W
VC 2000 W

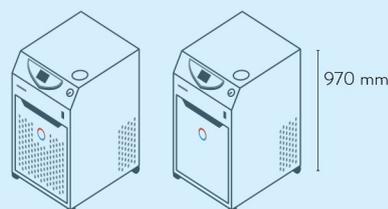

VC 3000
VC 5000
VC 3000 W
VC 5000 W

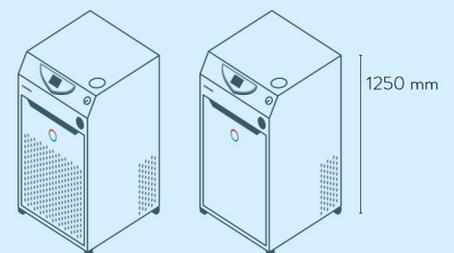

VC 7000
VC 10000
VC 7000 W
VC 10000 W

LAUDA Circulation and process thermostats

Interfaces

	Pt 100 (1)	Pt 100 (2)	USB	Ethernet	RS 232 / 485	Analog	Namur contact	Sub-D contact	Profibus	EtherCat M8	EtherCat RJ 45	Modbus	Profinet	Malfunction contact	Number of module slots, large	Number of module slots, small
LAUDA LOOP / Page 80	-	-	-	-	S	-	-	-	-	-	-	-	-	-	-	-
LAUDA PRO / Page 82	S	-	S	S	Z	Z	Z	Z	Z	Z	Z	-	-	-	1	-
LAUDA Integral T / Page 84	S	Z	S	S	Z	Z	Z	Z	Z	Z	Z	-	-	S	2	-
LAUDA Integral XT / Page 86	S	Z	S	S	Z	Z	Z	Z	Z	Z	Z	-	-	S	2	-
LAUDA Variocool / Page 88	Z	-	S	Z	Z	Z	Z	Z	Z	Z	Z	-	-	S	1	1
LAUDA Kryoheater Selecta / Page 90	S	-	S	-	OD	OD	-	-	OD	-	OD	-	OD	-	-	-

S = Series standard
 Z = Available as an accessory
 OD = optional (cannot be retrofitted)



LRZ 912
Analog module



LRZ 913
RS 232/485 interface



LRZ 914
Contact module with single input and single output (NAMUR)



LRZ 915
Contact module with 3 inputs and 3 outputs



LRZ 917
Profibus module




LRZ 918
Pt100/LiBus-Modul, small cover



LRZ 921
Ethernet module



LRZ 922
EtherCAT module with M8 connection




LRZ 923
EtherCAT module with RJ45 connection




LRZ 925
External Pt100/LiBus-module, large cover

LAUDA Kryoheater Selecta / Page 90

LAUDA-Noah Semistat / Page 92

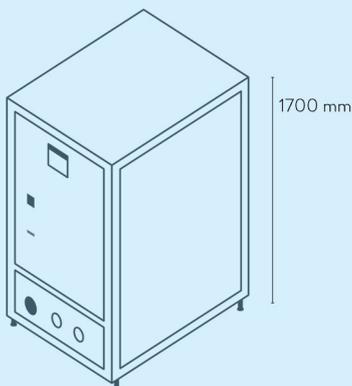


KHS 3560 W
KHS 2190 W



S 1200



S 2400



S 4400

LAUDA Circulation and process thermostats

Function overview

Operating element	LOOP	PRO E	PRO EC	Integral T	Integral XT	Variocool	Kryoheater Selecta
Display	OLED	OLED	TFT	TFT	TFT	TFT	TFT
Mode of operation	3-button softkey	Cursor softkey	Multi-touch	Cursor softkey	Cursor softkey	Cursor softkey	Multi-touch
Removable control	-	✓	✓	Z	Z	-	-
User management	-	-	✓	Operator / Viewer	Operator / Viewer	-	✓
Data logging, export to USB stick	-	-	✓	✓	✓	-	✓
1-point calibration	✓	✓	✓	✓	✓	✓	-
2-point calibration	✓	✓	✓	✓	✓	-	-
Self-adaptation controller	-	-	✓	✓	✓	-	-
Safety mode	-	✓	✓	✓	✓	-	-
Programmer, programs/segments	-	1 / 20	100 / 5000	5 / 150	5 / 150	5 / 150	OD
Programmer, tolerance range function	-	✓	✓	✓	✓	✓	OD
Ramp function	-	-	✓	Z	Z	-	OD
Timer function	-	-	✓	✓	✓	-	-
Countdown function	-	-	✓	-	-	-	-
Graphic temperature profile display	-	-	✓	✓	✓	✓	✓
Pump pressure display (digital)	-	-	-	✓	✓	-	✓
Adjustable bypass	-	-	-	✓	✓	✓	-
Level indicator (digital)	-	✓	✓	✓	✓	✓	✓
Standby timer	✓	✓	✓	✓	✓	✓	✓
Flow control instrument	-	-	-	-	-	Z	-
Flow pressure control	-	-	-	-	✓	-	✓
Flow measurement + control	-	-	-	-	Z	-	OD
Overflow	-	✓	✓	✓	✓	-	✓
Low-level alarm	✓	✓	✓	✓	✓	✓	✓
Drain tap	-	✓	✓	✓	✓	✓	✓

Z = Available as an accessory

OD = optional (cannot be retrofitted)

LAUDA Circulation and process thermostats

Technical data according to DIN 12876 standard

Device type	Working temperature range °C	Temperature stability ±K	Cooling of the refrigerating machine	Heater power max. kW	Cooling output kW													
					200 °C	100 °C	20 °C	10 °C	0 °C	-10 °C	-20 °C	-30 °C	-40 °C	-50 °C	-60 °C	-70 °C	-80 °C	-90 °C
LAUDA LOOP / Page 80																		
LOOP 100	4 ... 80	0.10	Air	0.2	-	-	0.12	0.06	-	-	-	-	-	-	-	-	-	-
LOOP 250	4 ... 80	0.10	Air	0.4	-	-	0.25	0.13	-	-	-	-	-	-	-	-	-	-
LAUDA PRO / Page 82																		
P 2 E	80 ... 250	0.05	Water	2.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
P 2 EC	80 ... 250	0.05	Water	2.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
RP 240 E	-40 ... 200	0.05	Hybrid	2.5	-	-	0.60 ³	0.60 ³	0.60 ³	0.41 ³	0.24 ²	0.12 ²	0.02 ¹	-	-	-	-	-
RP 240 EC	-40 ... 200	0.05	Hybrid	2.5	-	-	0.60 ³	0.60 ³	0.60 ³	0.41 ³	0.24 ²	0.12 ²	0.02 ¹	-	-	-	-	-
RP 245 E	-45 ... 200	0.05	Hybrid	2.5	-	-	0.80 ³	0.80 ³	0.80 ³	0.53 ³	0.34 ²	0.15 ²	0.04 ²	-	-	-	-	-
RP 245 EC	-45 ... 200	0.05	Hybrid	2.5	-	-	0.80 ³	0.80 ³	0.80 ³	0.53 ³	0.34 ²	0.15 ²	0.04 ²	-	-	-	-	-
RP 250 E	-50 ... 200	0.05	Hybrid	2.5	-	-	1.50 ³	1.44 ³	1.20 ³	0.84 ³	0.54 ²	0.29 ²	0.11 ²	0.02 ¹	-	-	-	-
RP 250 EC	-50 ... 200	0.05	Hybrid	2.5	-	-	1.50 ³	1.44 ³	1.20 ³	0.84 ³	0.54 ²	0.29 ²	0.11 ²	0.02 ¹	-	-	-	-
RP 290 E	-90 ... 200	0.05	Hybrid	2.5	-	-	0.80 ³	0.77 ³	0.74 ³	0.72 ³	0.70 ²	0.68 ²	0.64 ²	0.56 ²	0.39 ²	0.21 ²	0.09 ²	0.01 ¹
RP 290 EC	-90 ... 200	0.05	Hybrid	2.5	-	-	0.80 ³	0.77 ³	0.74 ³	0.72 ³	0.70 ²	0.68 ²	0.64 ²	0.56 ²	0.39 ²	0.21 ²	0.09 ²	0.01 ¹
LAUDA Integral T / Page 84																		
IN 130 T	-30 ... 120	0.05	Air	2.7	-	1.40	1.40	1.35	1.20	0.80	0.40	0.10	-	-	-	-	-	-
IN 230 T	-30 ... 120	0.05	Air	2.7	-	2.20	2.20	1.90	1.50	1.00	0.60	0.15	-	-	-	-	-	-
IN 230 TW	-30 ... 120	0.05	Water	2.7	-	2.30	2.30	2.30	1.90	1.30	0.75	0.35	-	-	-	-	-	-
IN 530 T	-30 ... 120	0.05	Air	8.0	-	5.00	5.00	4.50	3.80	2.60	1.50	0.60	-	-	-	-	-	-
IN 530 TW	-30 ... 120	0.05	Water	8.0	-	6.00	6.00	5.50	4.50	3.00	1.60	0.70	-	-	-	-	-	-
IN 1030 T	-30 ... 150	0.10	Air	8.0	-	11.00	11.00	9.50	7.10	4.90	3.00	1.60	-	-	-	-	-	-
IN 1330 TW	-30 ... 150	0.10	Water	16.0	-	13.00	13.00	10.00	7.60	5.40	3.40	1.70	-	-	-	-	-	-

¹Pump output step 2 ²Pump output step 4 ³Pump output step 8

Pump pressure max. bar	Pump flow max. pressure L/min	Pump connection thread mm	Bath volume min. L	Bath volume max. L	Dimensions (W x D x H) mm	Protection Rating	Noise level dB (A)	Weight kg	Loading max. kW	Power supply V; Hz	Cat. No.	Device type
0.8	2.6	Quick C. 1/4"	0.3	0.3	175×301×266	IP 21	57	6.9	0.2	100-240 V; 50/60 Hz	L000027	LOOP 100
0.8	2.6	Quick C. 1/4"	0.3	0.3	261×368×312	IP 21	57	11.9	0.4	100-240 V; 50/60 Hz	L000580	LOOP 250
0.7	22	M16×1	2.4	4.4	250×365×425	IP 21	47	15.5	2.7	200-230 V; 50/60 Hz	L000019	P 2 E
0.7	22	M16×1	2.4	4.4	250×365×425	IP 21	47	15.5	2.7	200-230 V; 50/60 Hz	L000020	P 2 EC
0.7	22	M16×1	2.4	4.4	300×430×675	IP 21	54	46.0	3.7	230 V; 50 Hz	L000021	RP 240 E
0.7	22	M16×1	2.4	4.4	300×430×675	IP 21	54	46.0	3.7	230 V; 50 Hz	L000023	RP 240 EC
0.7	22	M16×1	2.4	4.4	300×430×675	IP 21	54	46.0	3.7	230 V; 50 Hz	L000022	RP 245 E
0.7	22	M16×1	2.4	4.4	300×430×675	IP 21	54	46.0	3.7	230 V; 50 Hz	L000024	RP 245 EC
0.7	22	M16×1	2.4	4.4	300×430×675	IP 21	57	47.0	3.7	230 V; 50 Hz	L002494	RP 250 E
0.7	22	M16×1	2.4	4.4	300×430×675	IP 21	57	47.0	3.7	230 V; 50 Hz	L002495	RP 250 EC
0.7	22	M16×1	2.4	4.4	390×600×685	IP 21	56	79.0	3.7	230 V; 50 Hz	L002502	RP 290 E
0.7	22	M16×1	2.4	4.4	390×600×685	IP 21	56	79.0	3.7	230 V; 50 Hz	L002503	RP 290 EC
3.5	40	G 3/4	3.6	8.7	430×550×760	IP 21	61	76.0	3.7	230 V; 50 Hz	L002663	IN 130 T
3.5	40	G 3/4	3.6	8.7	430×550×760	IP 21	63	80.0	3.7	230 V; 50 Hz	L002664	IN 230 T
3.5	40	G 3/4	3.6	8.7	430×550×760	IP 21	58	82.0	3.7	230 V; 50 Hz	L002665	IN 230 TW
3.5	40	G 3/4	7.2	20.5	560×550×1325	IP 21	62	146.0	11.0	400 V; 3/PE; 50 Hz & 460 V; 3/PE; 60 Hz	L002666	IN 530 T
3.5	40	G 3/4	7.2	20.5	560×550×1325	IP 21	62	148.0	11.0	400 V; 3/PE; 50 Hz & 460 V; 3/PE; 60 Hz	L002667	IN 530 TW
5.5	60	M38×1,5	9.7	25.5	760×650×1605	IP 21	69	212.0	20.0	400 V; 3/PE; 50 Hz & 460 V; 3/PE; 60 Hz	L002668	IN 1030 T
5.5	60	M38×1,5	9.7	25.5	760×650×1605	IP 21	59	214.0	20.0	400 V; 3/PE; 50 Hz & 460 V; 3/PE; 60 Hz	L002669	IN 1330 TW